

SWTL-4538 Track Loader

Operating Weight: 9,700 LBS (4,400 KG)

Gross Power: 74.3 HP (55.4 kW)

Breakout Force: 7,470 lb (3,385 kg)





Turn over
for full
specifications!

Product Highlights

- Kubota Engine provides EPA T4F emission Standards
- Closed Hydraulic Traveling System for anti-overloading systems
- Universal pins for quick attachment hookups
- Double Accelerator Controls to adapt power and control
- Enclosed cab offers safety and comfort for extended work hours in tough conditions

Technical Specifications

Machine Weight		9,700 lb	4,400 kg
Machine Dimensions	Overall Length	12' 4"	3,750 mm
	Overall Height	9' 10"	2,071 mm
	Overall Width	6' 7"	2,015 mm
	Ground Clearance	9"	228 mm
Engine	Brand	KUBOTA	
	Model	V2403-CR-TE5B	
	Peak Torque	195.5 lb-ft	265 N-m
	Output	74.3 HP	55.4 kW
	Max Speed	8.1 mpha	13 kph
	Performance	Rated Operating Capacity	2,650 lb
Tipping Load		7,570 lb	3,430 kg
Curl Breakout Force		7,740 lb	3,385 kg
Lift Breakout Force		5,740 lb	2,600 kg
Turning Radius from Center		4' 6"	1,368 mm
Departure Angle		34 Degrees	
Dump Height		8' 1"	2,467 mm
Dump Reach		2' 11"	891 mm
Max Dump Angle		44 Degrees	
Hydraulics		Brand	KYB
	Displacement	23.8 gal/min	90 L/min
	Pressure	3,045 psi	210 bar
Fuel and Hydraulics Tanks	Fuel Tank Capacity	23.8 Gal	90 L
	Hydraulic Oil Capacity	10.6 Gal	40 L

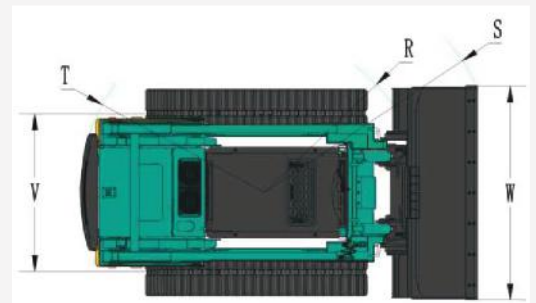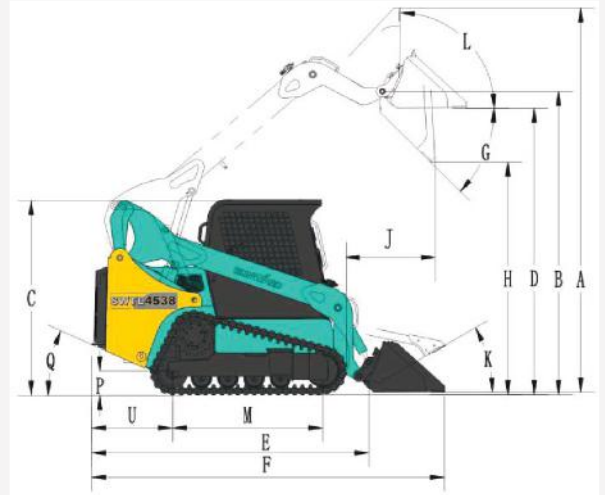

Sunward USA Corp

Web: www.sunwardusa.com

Address: 2710 Geesling Rd, Denton TX 76208

Contact Info:

Phone: 469-353-6890

Email: info@sunwardusa.com

Model:

SWTL-4538