

SUNWARD USA

Construction Equipment

SWSL-3946-HD Scissor Lift Platform

Working Height: 45' 3" / 13.8 m

Platform Max height: 38' 9" / 11.8 m

Lift Capacity: 770 lbs / 350 kg



Turn over for full specifications!




Technical Specifications

Dimension		
Working height*	45'3"	13.8m
A Platform height maximum	38'8.5"	11.8m
B Platform height (stowed)	4'10"	1.47m
C Platform length	7'5.5"	2.27m
Slide-out platform extension deck	3'	0.9m
D Platform width	3'7"	1.1m
E Stowed height (rails up)	8'5"	2.57m
Stowed height (rails down)	6'3.5"	1.92m
F Overall length	8'1"	2.47m
G Overall width	3'10"	1.17m
H Wheelbase	6'1.6"	1.87m
I Ground clearance (stowed)	0.75"	0.02m
J Ground clearance (raised)	4.3"	0.11m
Performance		
Lift capacity	770 lb	350kg
Lift capacity(extension deck)	250 lb	113kg
Max.platform occupancy (indoor/outdoor)	3/0	
Drive speed (stowed)	2 mph	3.2km/h
Drive speed (elevated)	0.5 mph	0.8km/h
Turning radius (inside)	3.94"	0.1m
Turning radius (outside)	7'3"	2.2m
Raise / lower speed	65s / 40s	
Gradeability**	25%	
Controls	Proportional	
Wheel driver	Dual front wheel	
Multiple disc brakes	Dual rear wheel	
Tires	15x5	381mmx129mm
Battery	4x12V/240Ah	
Charger	24V/30A	
Hydraulic tank capacity	5.3 gal	21L
Weight	7055 lb	3200kg

* Working height is equal to Platform height plus 2.

** climbing ability is suitable for driving on slopes; Refer to Operator Manual for slope level.

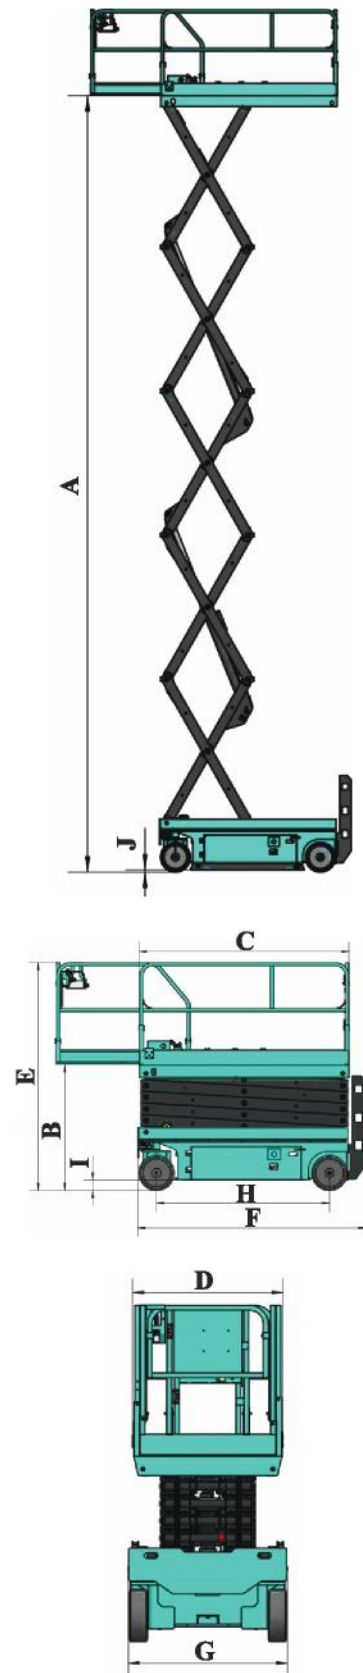

Sunward USA Corp

Web: www.sunwardusa.com

Address: 2710 Geesling Rd, Denton TX 76208

Contact Info:

Phone: 469-353-6890

Email: info@sunwardusa.com

Model:

SWSL-3946-HD Scissor Lift